
😢 Do	omain Administration [localhost] - Mozilla Firefox		- 🗆 🗵
Eile	Edit View History Bookmarks Tools Help del.icid	o.us	0
			-
	Default Values:		
	Name of the Domain:	yourdomain.com	
	Default Dial Plan:	Outbound	
	Default IVR Language:	Default System IVR Language 🔽	
	Tone Language:	Default System Tone Scheme	
	Web Language:	Default System Web Language 💌	
	Music on Hold Source:	File moh.wav 💌	
	Timezone:	Default Time Zone	
	Default PnP Dialplan Scheme:	User must press enter	
	Country code (e.g. "1"):		
	Area code (e.g. "978"):		
	Voicemail Timeout:	20	
	Voicemail Size:	20	
	Maximum Voicemail Duration:	500	
	Voicemail PIN Digits:	4	
	Require Entering Mailbox PIN:	C Yes ☉ No	
	Mailbox Escape Account (when caller presses 0):		
	Mailbox Direct Dial Prefix:	8	
	External Voicemail System:		
	Emergency Numbers:		
	Mailbox Explanation Prompt:	• Always ^O Not on personal recording	
	Call Forward On No Answer Timeout:	10	
	Park Reminder:	Turned off	
	From header when switching the domain:		
	To header when switching the domain:		
	Change names in To/From-headers:	⊙ Yes C No	
	Email Settings:		
	From (e.g. Joe Average <ja@domain.com>):</ja@domain.com>	"pbx" <pbxnsip@pbx.com></pbxnsip@pbx.com>	
	Account (e.g. user1):	mailuser1	
	Password (e.g. secret)	****	
	SMTP Server (e.g. smtp.domain.com):	mail.yourdomain.com	
	Send daily CDR report to:	sales@xeloq.com (try)	
•			•
Done			

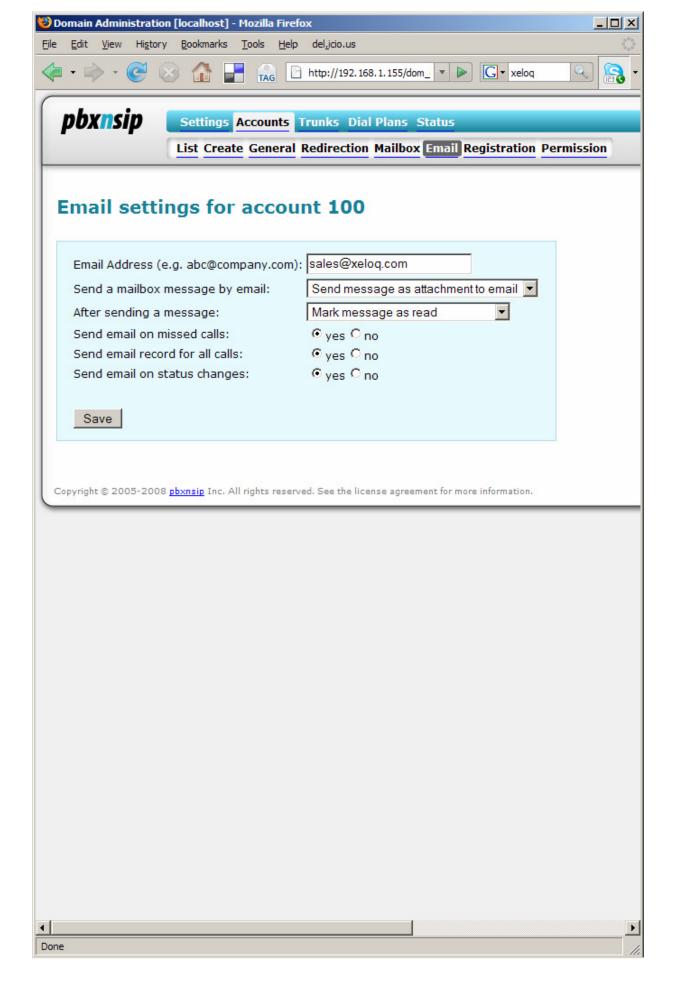

	ection Mailbox Email Registration Permission
diting Extension 100	
Primary Name:	100
Alias Names:	xeloq_sales
Dial Plan:	Outbound
First name (e.g. John):	XeloQ
Last name (e.g. Smith):	Sales
SIP Password:	*****
SIP Password (repeat):	*****
Web Password:	*****
Web Password (repeat):	******
PIN (e.g. 1234):	****
PIN (repeat):	****
Timezone:	Default Time Zone
IVR Language:	Default System IVR Language
Web Language:	Default System Web Language -
Upload picture:	Browse
Wakeup time (e.g. 7:15):	
Watch the calls of the following extensions (* for all):	
Watch the presence of the following extensions (* for all):	
Explicitly specify park orbit preference:	
Dialog Permissions:	
Block outgoing caller-ID:	⊙ no C yes
Save	

🕲 Domain Administration [Outbound] - Mozilla Firefox	_ 🗆 ×
<u>E</u> ile <u>E</u> dit <u>V</u> iew Hi <u>s</u> tory <u>B</u> ookmarks <u>T</u> ools <u>H</u> elp del <u>.</u> icio.us	0
	- 💦 🔍
pbxnSip Settings Accounts Trunks Dial Plans Status Admin Help L List Edit List Edit	ogout
Edit Dial Plan Outbound Quick Usage: Use simple patterns for matching the input (for example, "9*" or "911"), and just leave the replacement empty. Please see the or help for more information on how to use the advanced features of the dial plan.	nline
Pref Trunk Pattern Replacement 100 Unassigned Image: Communications Image: Communications Image: Communications 100 XeloQ Communications Image: Communications Image: Communications Image: Communications 110 XeloQ Communications Image: Communications Image: Communications Image: Communications Save Save Image: Communications Image: Communications Image: Communications	
Copyright © 2005-2008 <u>pbxnsip</u> Inc. All rights reserved. See the license agreement for more information.	

Domain Administration [XeloQ Communications] - Mozil	la Firefox		
e <u>E</u> dit <u>V</u> iew Hi <u>s</u> tory <u>B</u> ookmarks <u>T</u> ools <u>H</u> elp del <u>.</u> ici	io.us		
🗉 🔹 🔿 😴 🛞 🚮 📑 🙀 🕒 http://	/192.168.1.155/dom_trunl 🔻 🕨 🔽	▼ xeloq	🔍 🔝 ·
Edit Trunk XeloQ Communic	ations		
N = = = =	XeloQ Communications		
Name:			
Туре:	SIP Registration		
Display Name: XeloQ			
Account:	700204		
Domain: sip.goandcall.com			
Username:	700204		
Password:	*****		
Password (repeat):	*****		
Outbound Proxy:	sip.goandcall.com:6060		
CO Lines:			
Dialog Permissions:			
Codec Preference:			
Proposed Duration (s): 3600 💌	· · · · · · · · · · · · · · · · · · ·		
Keepalive Time:			
Send email on status change: O yes O no			
Strict RTP Routing:	O on ☉ off		
Avoid RFC4122 (UUID): O on O off			
Accept Redirect:	⊂ on ⊙ off		
Prefix:			
Visible in all dial plans:	O _{yes} ⊙ _{no}		
Trunk DID:			
Remote Party/Privacy Indication:	No Indication	-	
Failover Behavior:	No failover 💌		
Is Secure:	O yes 🖲 no		
Send call to extension:	100		
Assume that call comes from user:			
Ringback:	O Message 180 Media		
			_
Save			
e			

E	ile	<u>E</u> dit <u>V</u> iew Higtory <u>B</u> ookmarks <u>T</u> ools <u>H</u> elp del <u>.</u> ici	o.us	0
l		I		_
l		General:		
l		System Name	pbxNsip	
l		Audio Language:	English	
l		Tones:	English	
l		Web Language:	English	
l		Timezone:	Central Europe	
l		Administrator Login:		
l		Username:	admin	
l		Password:	****	
l		Password (repeat):	****	
l		Password (repear).		
		Appearance:		
l		Web Session Timeout (s):	3600	
l		Password Strength:	Medium security	
l		Default CDR listing size:	30	
l		Keep CDR Duration (smhd):	7d	
l		Offer Camp On:	⊙ on ○ off	
l		Performance:		
l			10	
l		Maximum Number of Calls:		
l		Process Affinity Mask:*		
l		Maximum Duration of Call Recording (s):	600	
l		Minimum Registration Time:	30	
l		Maximum Registration Time:	360	
l		UDP NAT Refresh:	30	
l		TCP/TLS NAT Refresh:	180	
l		Maximum call duration:	7200	
		CID Cotting of		
l		SIP Settings: Use Short SIP Headers:		
l		Listen to sip.mcast.net:*	○ Short ⊙ Long ⊙ Yes ○ No	
l		Allow domain admin to change trunks:	© Yes C No	
l		Allow users to change their SIP passwords:	© Yes C No	
		Loopback detection:	⊙ on C Off	
		Inband DTMF detection:	⊙ On C Off	
		Remote SIP management	C on [©] Off	
		Calling own extension number goes to mailbox	: © On ♥ Off	-
•	one			
-	one			11.

	Ports Logging Configuration Certificate MoH PnP	
orts		
orts		
ease specify which ports should be u	sed. See the manual for more information on these imp	ortant
HTTP:*		
HTTP Port:	80	
HTTPS Port:	443	
SIP:*		
SIP: **	5060	
SIP TCP Ports:	5060	
SIP TLS Ports:	5061	
SIP IP Replacement List:		
IP Routing List:		
RTP:*		
Port Range Start:	49152	
Port Range End: Follow RTP:	64512	
Codec Preference:	• on • off 0891823	
SNMP:*		
SNMP Port:	161	
SNMP Trusted Addresses:		
SNMP Community:	public	
TFTP:		
TFTP Port:*	69	
Allow TFTP Write:	C on ⊙ off	
Write generated files:	• To file • To log	
Allow TFTP Password:	Never 💌	

Optionally, change the Log Level to level 9 **only in case** you have problems. By default, keep it at the normal Log Level.

